



MULTILOGGER THERMOMETER

MODEL: 806A

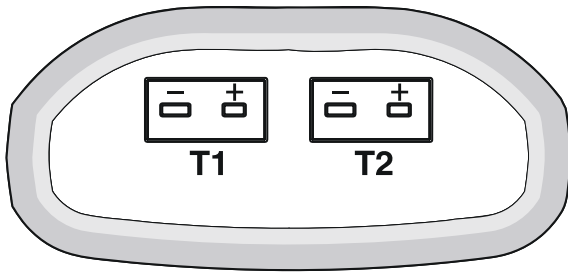

FEATURES:

USB Port provides excellent user interface.
 DC 12V adapter.
 Basic accuracy: 0.05%.
 Dual inputs with K/J/E/T/R/S/N thermocouple.
 Triple display with set-table backlight.
 Real time clock and calendar.

Data logger capacity:

Save data: 256 samples with real-time data.
 Data logger: 16 sets, Max 16000 data capacity.
 Easy read data with uP/down keys.
 Selectable Auto Power Off function.
 Warning beeper with Hi/Lo setting.
 Max/Min/AVG/REL/HOLD function.
 MAIN display for T1/T2.
 SECOND display for T1/T2.
 THIRD display for T1-T2, with real time clock and calendar.

TEMPERATURE SPECIFICATIONS

Thermocouple	Range
K-TYPE	(0.1°, 1° for above 2000°F) -200°C to 1372°C, -328°F to 2501°F
J-TYPE	(0.1°, 1° for above 2000°F) -210°C to 1200°C, -346°F to 2192°F
T-TYPE(0.1°)	-200°C to 400°C, -328°F to 752°F
E-TYPE(0.1°)	-210°C to 1000°C, -346°F to 1832°F
R-TYPE(1°)	0°C to 1767°C, 32°F to 3212°F
S-TYPE(1°)	0°C to 1767°C, 32°F to 3212°F
N-TYPE	(0.1°, 1° for above 2000°F) -50°C to 1300°C, -58°F to 2372°F

According to temperature standard ITS-90.

Accuracy: K/J/T/E-TYPE

±(0.05% rdg + 0.3°C) on -50°C to 1372°C
 ±(0.05% rdg + 0.7°C) on -50°C to -210°C
 ±(0.05% rdg + 0.6°F) on -58°F to 2501°F
 ±(0.05% rdg + 1.4°F) on -58°F to -346°F

N-TYPE

±(0.05% rdg + 0.8°C) on -50°C to 0°C
 ±(0.05% rdg + 0.4°C) on 0°C to 1300°C
 ±(0.05% rdg + 1.6°F) on -58°F to 32°F
 ±(0.05% rdg + 0.8°F) on 32°F to 2372°F

R/S-TYPE

±(0.05% rdg + 2°C) on 0°C to 1767°C
 ±(0.05% rdg + 4°F) on 32°F to 3212°F

Accessories: USB cable.

12VDC Adaptor(Option)

CHY FIREMATE CO., LTD.
 NO.3 SHENG-LI 1ST STREET, HSIN-TIEN VILLAGE,
 JEN-TE HSIANG, TAINAN HSIEN, TAIWAN R.O.C.
 TEL: 886-6-2794811 FAX: 886-6-2700227
 E-Mail: chy@ksts.seed.net.tw Ver.1.1 031810

Customer Approved By:	Prepared By:
	Bruce Hsieh Engineer Manager CHY