

**UNI-T**


## UTD2000L SERIES

### Digital Storage Oscilloscopes

UTD2025CL / UTD2052CL



EN 61010-1

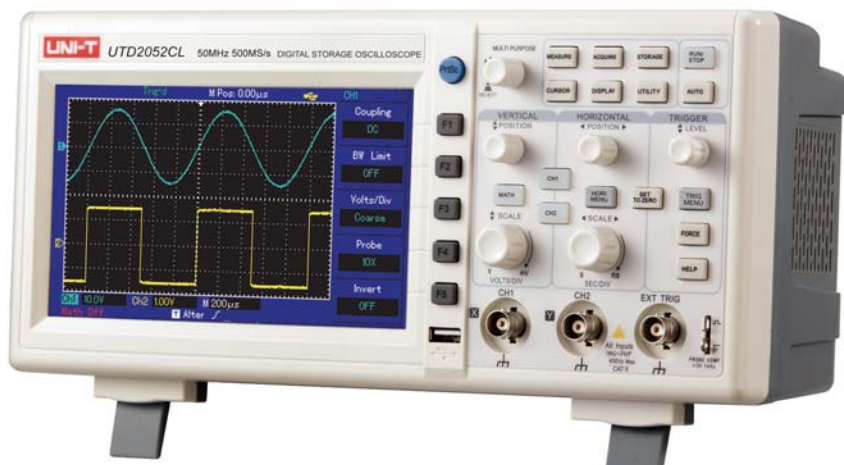

## SPECIFICATIONS

Specifications	UTD2025CL	UTD2052CL
Channels	2	
Bandwidth	25MHz	50MHz
Sample Rate	250MS/s	500MS/s
Rise Time	≤14ns	≤7ns
Memory Depth	25kpts	
Waveform Acquisition Rate	≥2000wfms/s	
Vertical Sensitivity	1mV/div~20V/div	
Time-Based Range	10ns/div~50s/div	5ns/div~50s/div
Storage	Setup, Wave, Bitmap	
Trigger Modes	Edge, Pluse, Video, Alternate	Edge, Pluse, Alternate
Interfaces	USB OTG, Pass/Fail	USB OTG

## GENERAL CHARACTERISTICS

Power	100-240VAC, 45-440Hz
Display	7 Inches 64K Color TFT LCD, (400×240)
Product Color	White and Gray
Product Net Weight	2.2Kg
Product Size	306mm × 147mm × 122mm
Standard Accessories	Probe×2 (1×, 10× switchable), Power Cord, USB Cable, PC Software CD
Standard Individual Packing	Gift Box, English Manual
Standard Quantity Per Carton	2 PCs
Standard Carton Measurement	450mm × 420mm × 280mm(0.053 CBM Per Standard Carton)
Standard Carton Gross Weight	8.5 Kg