


4. Product specifications: GLL 2-50 Prof.

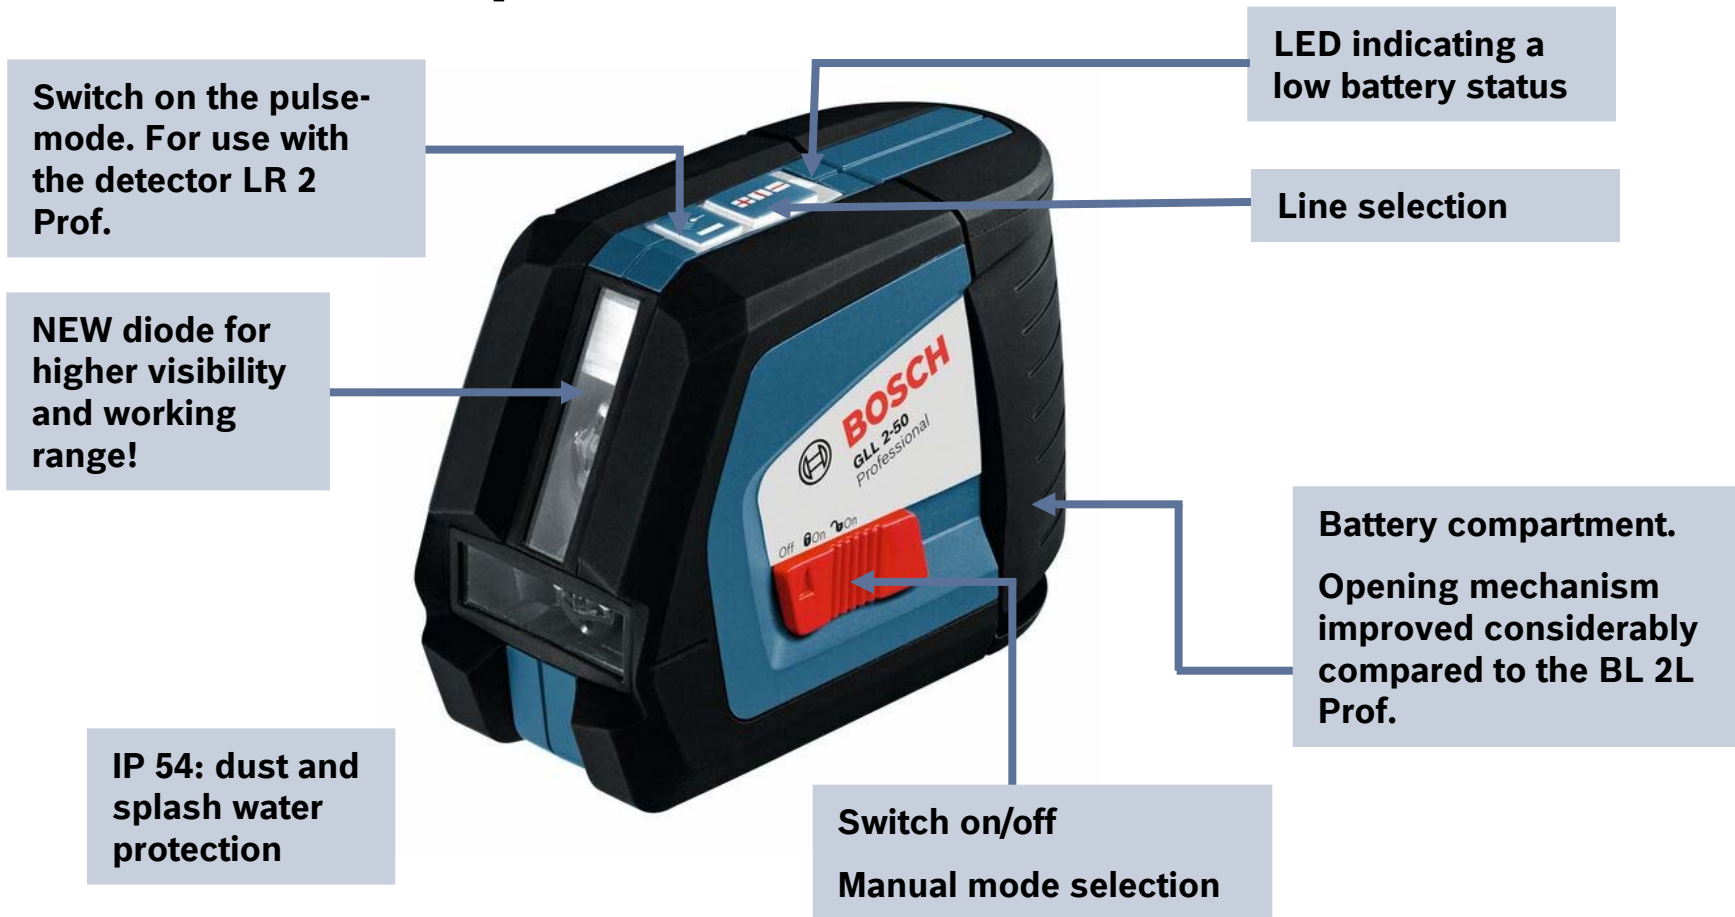

GLL 2-50 Prof. - Features

Line selection:

Switch-on device:

the horizontal and vertical lines are projected

1st push:

the vertical line is switched off and the horizontal line is projected


2nd push:

horizontal line is switched off and the vertical line is projected

3rd push:

both lines are projected again

If the LED blinks **red**, the batteries are low and need to be replaced.

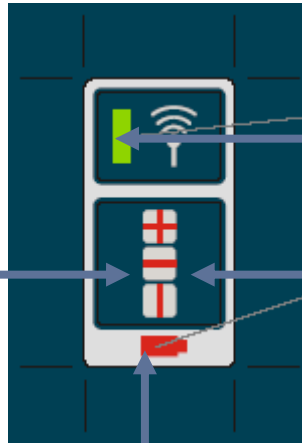

Pulse-mode:

On = **green** LED

When this mode is activated, the LR 2 Prof. can detect the beams up to a distance of **50m**.

However the visibility of the line is not so good as in normal mode.

2nd function of the “line selection button”:

Keep this button pushed for > 3s to de-activate the automatic switch-off function when switching on the device.

To re-activate it, switch-off the device and switch it on again. It will then switch off after 30min if the device was not used in this time.



BOSCH

4. Product specifications

GLL 2-50 Prof.

Accuracy	+/- 0,3 mm/m
Self-levelling area	+/- 4°
Self-levelling time	< 4 s
Laser power beam	Class 2, < 1mW
Visibility without receiver	20 m in standard mode 15 m in pulse mode
Working range with receiver	5 - 50 m
Working time with Alkaline batteries	20 h in 1 line mode 12 h in 2 line mode
Weight (with standard batteries)	0,45 kg



BOSCH